




ILS 05 K

ILS 05 K is ready to gift a good combination between economy and high quality. With capacity up to 500 Kg and there are 30 different platform size to choose.

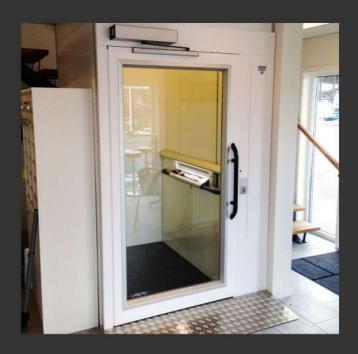

Platform Size

Width: 700-1100 mm Depth: 1100-1600 mm

1000 mm x 1500 mm (standard) 1100 mm x 1500 mm (standard) 1100 mm x 1600 mm (standard)

Lift Dimensions



1470 x 1680 mm

Shaft Color

Standard



RAL 9003

Options



*Choose between 198 different RAL Colors

Standard



Options



Recommended Installation

Indoors and Outdoors

Rate Load 500 Kg

Height Limits

Max travel height 15 m Top height 2,3 mm

Stops

Max 5 Floor

Drive System

Screw and Nut

Control System

PLC

Platform Button

Automatic Run & All button with tactile & braille

Max 0,15 m/sec

Battery Emergency

incl. as standard

Motor 2,2 KW

Pit Depth 50 mm

Power Supply

220-380V1 or 3-phase 50/60 Hz 16A, frequency converter



STANDAR & OPTIONS

Door Handle, 30 cm


Black Painted (Standard) Stainless Steel (Option)





Floor Indicator (Option)

Digital display that indicates which floor the lift is currently standing on



Ramp (Option)

If the lift is installed without a pit, a ramp is required according to



2-way Communication System (Option)

All Orkanda are able to install a 2-way communication system which allows access from inside and outside the lift in



Glass Types

2-way Communication System 4+4+0,75 mm tempered and laminated safety glass. Select between 4 different types.

- Clear
- Tinted
- Frosted
- Dark Tinted



Door & Window Frame Colors

Alumunium Color (Standard) 199 Different RAL Colors (Option)



Half Door on Top Floor (Option)



Side Plate Panel Colors

Alumunium Color (Standard) 199 Different RAL Colors (Option)