


orkanda
Home Lift Supplier

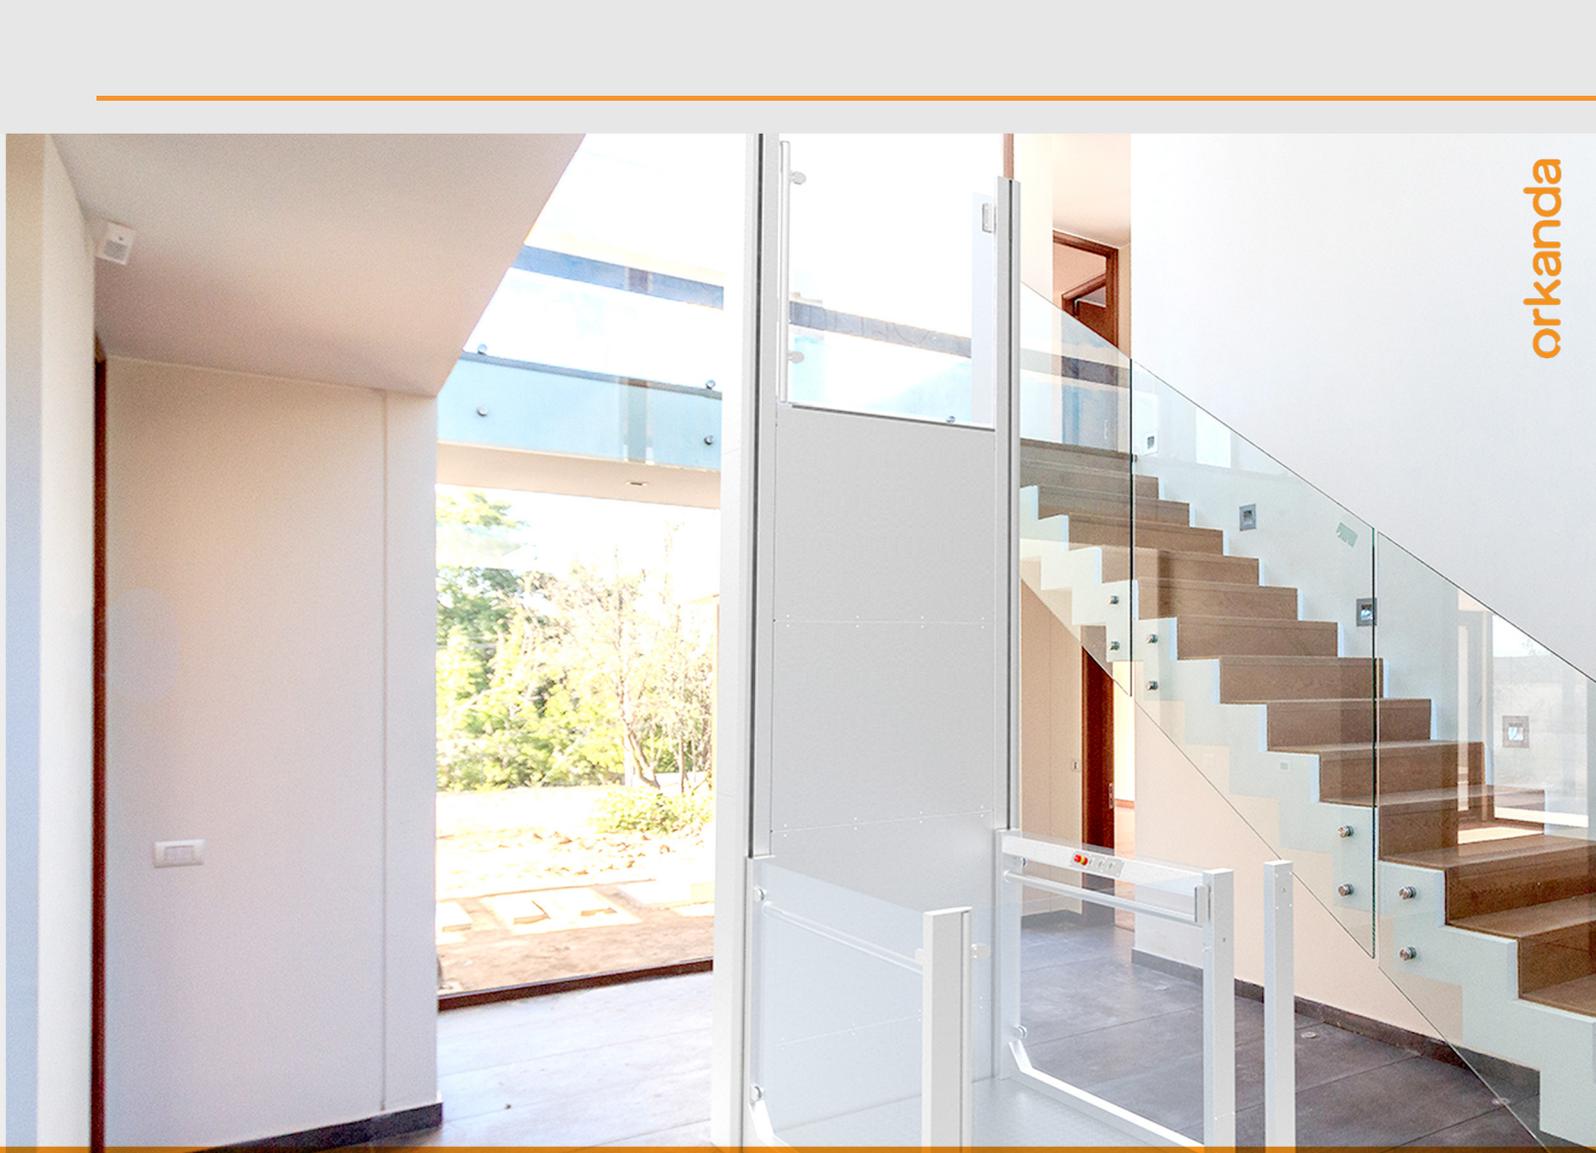

ORKA 150
Catalogue Product

A photograph of the Orka 150 Open Platform Lift installed in a modern building. The lift is a white, open-frame structure with a platform and handrails, positioned between a ground floor and an upper level. To the right, a staircase with wooden treads and a glass railing is visible. The background shows a bright outdoor area with trees and a paved walkway. The lift is currently in its retracted position, allowing for a clear view through the opening.

ORKA 150

Open platform lift

Orka 150 is Open Platform Lift, also known as Wheelchair Lift, which provides internal or external vertical travel up to 3 meters.

Our Open Platform Lift can accommodate changes in level from 600 mm up to 3000 mm in commercial and domestic environments and is appropriate alternative solution to a fully enclosed platform lift.

Orka 150 is specifically designed for applications with little or no alterations to existing buildings.

The open type design offers an aesthetically pleasing solution with brushed stainless steel finish as option. The lift provides a safe and easy way to gain access to a property where stairs would otherwise prevent wheelchair access.

It is designed to give customers choice and flexibility. Orka 150 Open Lift is a space saving and cost effective way to provide access for everyone to your home or workplace.



All our lifts are supplied with a 24-months warranty as standard, and we offer a range of maintenance and service options, which can be tailored to suit your specific requirements.

Features

- Modern lightweight design
- Stainless steel construction as option
- Low space requirements
- High level of security
- Silent operation
- Simple to use
- No pit required
- Simple to install and easy to service
- overall low maintenance and running costs

Specifications

User group	Ambulant and wheelchair users
Suitability	For internal or external use
Travel	From 600 mm up to 3000 mm
Number of stops	2
Maximum capacity	400 kg
Platform size	1100 x 1400 mm (standard)
External dimensions	1300 x 1770 mm (standard)
Gate	950 x 1100 mm (standard) with auto closers
Cabin height	1100 mm
Drive type	Belt
Power	220-240 V, 1 phase, 16A 380-400 V, 3 phase, 10A, 50 Hz
Lighting	Controls illuminated
Safety edge	Safety edge-under platform proximity sensors
Handrail	Integrated to lift cabin (on both sides)
Machine room	Integral to guide rails
Floor	Anti slip rubber (Anti slip diamond plate for outdoor version)
Finish	RAL 9006 (White aluminium)

Options

PLATFORM

900 x 1400 mm
1000 x 1400 mm

GATE

Automatic upper gate
Automatic lower gate

CONTROL

Configurable control side
Dual control on the platform
Auto dialer on the platform
Remote control
Braille on the control

SAFETY

Battery emergency lowering device

FINISH

Painted in any RAL color
Brushed Stainless Steel



Orka 150 Stainless Steel



Orka 150 Red







“The only disability in life is a bad attitude”

Bringing back the spirit for life.

orkanda

www.orkanda.co.id

Jakarta

Ruko Graha Boulevard Blok B-05
Jl. Raya Boulevard Kelapa Gading
Jakarta Utara – Indonesia 14240

Surabaya

Gedung Medan Pemuda, Lt.4
Jl. Pemuda No. 23-71, Surabaya
Jawa Timur – Indonesia 60271



Orkanda lifts



@orkandaliftindonesia



@orkanda.id



OrkandaUAB